

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 973 152 A2**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
19.01.2000 Bulletin 2000/03

(51) Int Cl.7: **G10K 15/02**(21) Application number: **99305632.4**(22) Date of filing: **15.07.1999**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **Pompei, Frank Joseph**  
**Somerville, MA 02145 (US)**

(74) Representative: **Carpenter, David**  
**MARKS & CLERK,**  
**Alpha Tower,**  
**Suffolk Street Queensway**  
**Birmingham B1 1TT (GB)**


(30) Priority: **16.07.1998 US 116271**  
**27.04.1999 US 300022**

(71) Applicant: **MASSACHUSETTS INSTITUTE OF  
TECHNOLOGY**  
**Cambridge, MA 02139 (US)**

(54) **"Parametric audio system"**

(57) Ultrasonic signals are used to transmit sounds from a modulated ultrasonic generator (14) to other locations from which the sound appears to emanate. In particular, an ultrasonic carrier is modulated with an audio signal and demodulated on passage through the atmosphere. The carrier frequencies are substantially higher than those of prior systems, e.g. at least 60 kHz,

and the modulation products thus have frequencies which are well above the audible range of humans; as a result, these signals are likely to be harmless to individuals who are within the ultrasonic fields of the system. The signals may be steered to moving locations, and various measures are taken to minimise distortion and maximise efficiency.

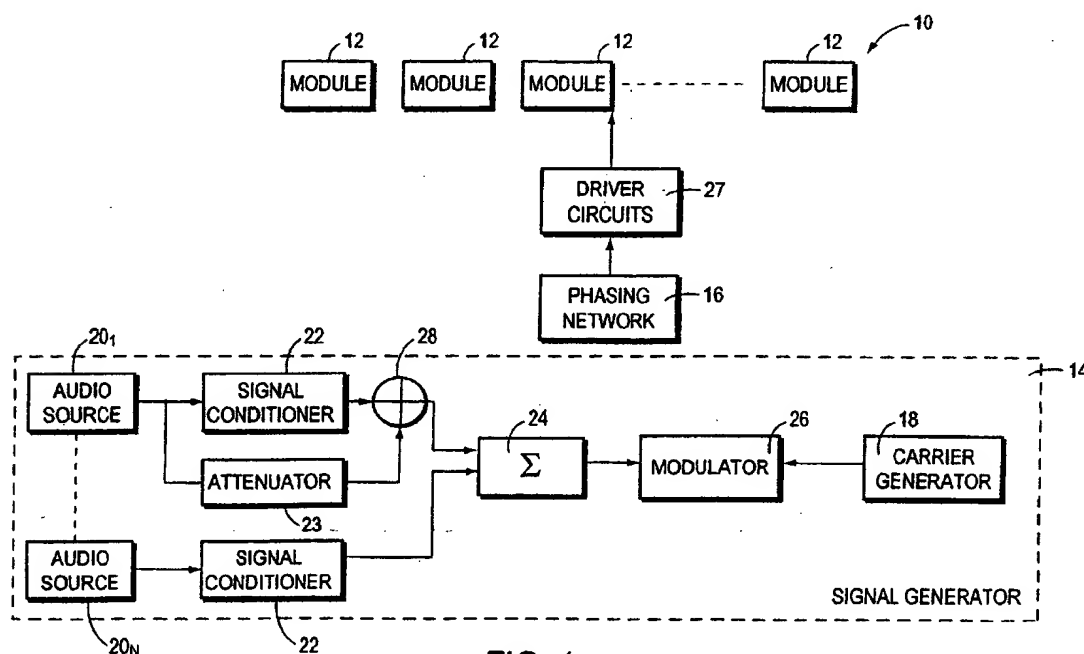**FIG. 1****EP 0 973 152 A2**

## Description

## FIELD OF THE INVENTION

5 [0001] This invention relates to the projection of audio signals to apparent sources removed from the transducers that generate these signals. More specifically, it relates to a parametric sound system that directs an ultrasonic beam, modulated with an audio signal, toward a desired location, with non-linearity of the atmospheric propagation characteristics demodulating the signal at locations distant from the signal source.

## 10 BACKGROUND OF THE INVENTION

[0002] It is well known that an ultrasonic signal of sufficiently high intensity, amplitude-modulated with an audio signal, will be demodulated on passage through the atmosphere, as a result of a non-linear propagation characteristics of the propagation medium. Prior systems based on this phenomenon have been used to project sounds from a modulated  
15 ultrasonic generator to other locations from which the sounds appear to emanate. Specifically, arrays of ultrasonic transducers have been proposed for projecting audio-modulated ultrasonic beams, which can be steered to move the locations of the apparent sources of the demodulated audio contents. Moreover, the audio signals regenerated along the path of the ultrasonic beam are characterized by directivity corresponding to that of the beam. The signals can thus be directed to a particular location, with the audio signals being received at that location and not at other locations  
20 disposed away from the beam axis.

[0003] The directivity of the audio signals is maintained when the ultrasonic beam is reflected from a surface and, in fact, a proposed beam steering arrangement involves the use of a rotatable reflecting surface. On the other hand, if the beam is projected to a surface that absorbs acoustical energy at ultrasonic frequencies but reflects it at audio frequencies, the audio content of the signal will be reflected with reduced directivity, with the sound appearing to originate at the point of reflection. These characteristics give rise to a number of highly useful applications of these systems.  
25 For example, one may direct the ultrasonic beam so as to track a moving character that is projected on a screen and the apparent source of the sound will move across the screen along with the character. One may project the beam at a stationary or moving individual in an area in which other individuals are also positioned and the demodulated sound will be heard by that individual, largely to the exclusion of others. Similarly, one may project the beam into an area so  
30 that individuals who pass into the area will receive a message keyed to that location. For example, in an art gallery, messages keyed to individual paintings may be projected into the areas in front of the paintings.

[0004] With such useful applications for parametric sonic beam technology, one would expect it to have a wide commercial application. This has not been the case, however, and it appears that several factors have militated against commercial acceptance. For example, the transducer arrays that project the ultrasonic beams have heretofore been  
35 expensive to manufacture and characterized by low efficiency converting electrical energy into acoustical energy, resulting in bulky and cumbersome systems.

[0005] Moreover, the transducers have been characterized by a narrow bandwidth, making it difficult to compensate for distortion as discussed herein.

[0006] Another deficiency in prior systems has been the use of a relatively low ultrasonic carrier frequency, e.g., 40 kHz, which can result in modulation components whose frequencies are close to the upper limit of human audibility. Thus the intensities of these components can be such as to damage human hearing without the victims being aware of the high-intensity environment and thus being unaware of the harm to which they are subjected. Moreover, these components are well within the hearing range of household pets and can be very annoying or harmful to them as well. With inefficient transducers it is impractical to use higher frequencies, since atmospheric absorption of ultrasonic energy  
45 increases rapidly as a function of frequency.

## SUMMARY OF THE INVENTION

[0007] A parametric system incorporating the invention uses carrier frequencies substantially higher than those of prior systems. Specifically, I prefer to use a carrier frequency of at least 60 kHz. The modulation products thus have frequencies which are well above the audible range of humans and these signals are therefore likely harmless to individuals who are within the ultrasonic fields of the system. It should be emphasized that, as used herein, the term "modulation" refers broadly to the creation of an ultrasonic signal in accordance with an information-bearing signal, whether or not the information-bearing signal is actually used to modify the carrier; for example, the composite signal  
55 (i.e., the varied carrier) may be synthesized *de novo*.

[0008] To generate the ultrasonic signals I prefer to use membrane transducers, which couple to the atmosphere more efficiently than the piezoelectric transducers characteristic of prior systems. The preferred membrane transducers are electrostatic transducers. However, membrane type piezoelectric transducers, operating in a transverse mode, are

also effective. The transducers are preferably driven with circuits in which the capacitances of the transducers resonate with circuit inductances at the acousto-mechanical resonant frequencies of the transducers. This provides a very efficient transfer of electrical energy to the transducers, thereby facilitating the use of relatively high carrier frequencies.

[0009] The high efficiency and versatility of the transducers described herein also makes them suitable for other ultrasonic applications such as ranging, flow detection, and nondestructive testing.

[0010] The efficiency of the system can be further increased by varying the power of the ultrasonic carrier, as described below, so as to provide essentially 100 percent modulation at all audio levels. Thus, at lower audio levels, the carrier level is reduced from that required for higher audio levels, resulting in a substantial reduction in power consumption.

[0011] Preferably a plurality of transducers are incorporated into a transducer module and the modules are arranged and/or electrically driven so as to provide, in effect, a large radiating surface and a large non-linear interaction region. With this arrangement, the system can generate a relatively high sound level without an unduly high beam intensity, as might be the case with the use of a transducer arrangement having a smaller radiating surface and interaction region, which is driven to generate a higher ultrasonic intensity to accomplish the same level of audible energy transmission. The transmitted beam can be steered either by physically rotating the array or using a rotatable reflecting plate, or by altering the phase relationships of the individual transducer modules in the array.

[0012] Atmospheric demodulation, on which parametric audio systems rely to derive the audio signals from the ultrasonic beam, results in quadratic distortion of the audio signals. To reduce this distortion the audio signals have been preconditioned, prior to modulation, by passing them through a filter whose transfer function is the square root of the offset, integrated input audio signal. I have found that when sound effects or certain types of music are used, pleasant effects can be sometimes obtained by omitting some of the preconditioning, or by overmodulating the carrier. When the resulting ultrasonic beam is demodulated by the atmosphere, the music or sound effects have enhanced harmonic effects, and are created more efficiently, and are therefore substantially louder for a given ultrasonic intensity.

## BRIEF DESCRIPTION OF THE DRAWINGS

[0013] The invention description below refers to the accompanying drawings, of which:

Fig. 1 is a schematic diagram of a parametric sound system incorporating the invention;

Fig. 2A is an exploded view of an electrostatic transducer module incorporating the invention;

Fig. 2B depicts a modification of the transducer module of Fig. 2A, configured for multiple-resonant-frequency operation;

Figs. 3A, 3B and 3C depict representative transducer modules;

Figs. 3D and 3E illustrate arrays of transducer modules;

Fig. 4 is a circuit diagram of a drive unit that drives transducers in the sound system;

Fig. 5 is a diagram of a circuit used to drive transducers having different mechanical resonance frequencies;

Figs. 6A and 6B illustrate transducer modules employing piezoelectric membrane transducers;

Fig. 7 illustrates the use of the system in reflecting sound from a wall;

Fig. 8 illustrates the use of multiple beam projectors used to move opponent sound sources in three-dimensional space;

Fig. 9 illustrates an adaptive modulation arrangement for a parametric sound generator;

Figs. 10A and 10B show, respectively, the frequency-dependent decay of ultrasonic signals through the atmosphere and the result of correcting for this phenomenon;

Fig. 11 illustrates the use of a transducer area for both transmission of parametric audio signals and reception of audio signals.

## DETAILED DESCRIPTION OF AN ILLUSTRATIVE EMBODIMENT

[0014] As shown in Fig. 1 a parametric sound system embodying the invention includes a transducer array 10 comprising a plurality of ultrasonic transducer modules 12 arranged in a two or three-dimensional configuration. Each of the modules 12 preferably contains a plurality of transducers as described herein. The transducers are driven by a signal generator 14 by way of a phasing network 16. The network 16 applies variable relative phases to the signals applied to the transducers in order to facilitate electronic focusing, steering, or otherwise modifying the distribution of ultrasound radiated by the array 10. Alternatively, because the signal is wideband, it is possible to use delay--i.e., a constant relative phase shift across all frequencies--rather than variable phase shifting to steer the beam. In any case, network 16 can be omitted in applications where steering is not required.

[0015] The signal generator 14 includes an ultrasonic carrier generator 18, one or more audio sources 20<sub>1</sub> ... 20<sub>n</sub>, whose outputs pass through optional signal conditioners 22 and a summing circuit 24. Signal conditioning can also be

performed after summation. The composite audio signal from the circuit 24 is applied to an amplitude modulator 26 that modulates the carrier from the generator 18. The modulated carrier is applied to one or more driver circuits 27, whose outputs are applied to the transducers in the array 10. The modulator 26 is preferably adjustable in order to vary the modulation index.

5 **[0016]** As shown in Fig. 1, a portion of the signal from one or more of the sources 20 may, if desired, bypass the associated signal conditioner 22 by way of an attenuator 23. This unconditioned signal is summed by a summer 28 with the output of the conditioner 22 to provide an "enriched" sound in the demodulated ultrasonic beam.

**[0017]** The frequency of the carrier provided by the generator 18 is preferably of the order of 60 kHz or higher. Assuming that the audio sources 20 have a maximum frequency of approximately 20 kHz, the lowest frequency components of substantial intensity in accordance with the strength of the audio signal in the modulated signal transmitted by the array 10 will have a frequency of approximately 40 kHz or higher. This is well above the audible range of hearing of human beings and above the range in which, even though the energy is inaudible, the human hearing system responds and therefore can be damaged by high intensities. It is unlikely that relatively high acoustical intensities at frequencies well above the range of hearing will degrade the hearing capabilities of individuals subjected to the radiated energy.

15 **[0018]** As shown in Fig. 2A, an electrostatic transducer module 29 incorporating the invention may include a conical spring 30 that supports, in order, a conductive electrode unit 32, a dielectric spacer 34 provided with an array of apertures 36, and a metallized polymer membrane 38. The components 32-38 are compressed against the spring 30 by an upper ring 40 that bears against the film 38 and threadably engages a base member 42 that supports the spring 30. The module 29 comprises a plurality of electrostatic transducers, corresponding with the respective apertures 36 in the polymer spacer 34. Specifically, the portion of the film 38 above each of the apertures and the portion of the electrode unit 32 beneath the aperture function as a single transducer, having a resonance characteristic that is the function, *inter alia*, of the tension and the area density of the film 38, the diameter of the aperture and the thickness of the polymer layer 34. A varying electric field between each portion of the membrane 38 and electrode unit 32 deflects that portion of the membrane toward or away from the electrode unit 32, the frequency of movement corresponding to the frequency of the applied field.

**[0019]** As illustrated the electrode unit 32 may be divided by suitable etching techniques into separate electrodes 32a below the respective apertures 36, with individual leads extending from these electrodes to one or more driver units 27 (Fig. 1).

30 **[0020]** The foregoing transducer configuration is easily manufactured using conventional flexible circuit materials and therefore has a low cost. Additionally, drive unit components can be placed directly on the same substrate, e.g., the tab portion 32b. Moreover it is light in weight and can be flexible for easy deployment, focusing and/or steering of the array.

35 **[0021]** It will be appreciated that geometries, in particular the depths of the apertures 36, may vary so that the resonance characteristics of the individual transducers in the module 29 span a desired frequency range, thereby broadening the overall response of the module as compared with that of a single transducer or an array of transducers having a single acoustical-mechanical resonance frequency. This can be accomplished, as shown in Fig. 2B, by using a dielectric spacer 34 that comprises two (or more) layers 34a and 34b. The upper layer 34a has a full complement of apertures 36a. The lower layer 34b, on the other hand, has a set of apertures 36b that register with only selected ones of the apertures 36a in the layer 34a. Accordingly, where two apertures 36a, 36b register, the aperture depth is greater than that of an aperture in the layer 34a above an unapertured portion of the layer 34b. The electrode unit 32 has electrodes 32b beneath the apertures in the layer 34b and electrodes 32c beneath only the apertures in the layer 34a. This provides a first set of transducers having higher resonance frequencies (shallower apertures) and a second set having lower resonance frequencies (deeper apertures). Other processes, such as screen printing or etching, can also produce these geometries.

45 **[0022]** Fig. 3A illustrates another transducer module 43 capable of relatively broad-band operation. The module has a generally cylindrical shape, the figure illustrating a radial segment thereof. As shown, an electrically conductive membrane 50 is spaced from a back plate electrode unit 52 by a dielectric spacer 54. The top surface 54a of the spacer is interrupted by annular grooves 56 and 58. The module 43 includes suitable structure (not shown) forcing the membrane 50 against the top surface 54a. Thus the module comprises a plurality of transducers defined by the membrane 50 and the top edges of the grooves 56 and 58.

50 **[0023]** The grooves 56 are deeper than the grooves 58 and, therefore, the transducers including the grooves 56 have a lower resonance frequency than those incorporating the grooves 58. The resonance frequencies are spaced apart sufficiently to provide a desired overall response that corresponds to the bandwidth of the modulated ultrasonic carrier.

55 **[0024]** The back plate electrode unit 52 may be provided with a conductive pattern comprising rings 53, 55 and 57, as shown in Figs. 3B and 3C so that the respective transducers can be individually driven as described herein. The spacings of the rings 53 and 55 and the relative phases of the applied signals can be selected so as to shape the

ultrasonic beams projected from the transducer modules.

[0025] Figs. 3D and 3E illustrate arrays of transducer modules in which the modules have alternative configurations. In Fig. 3D, each of the modules has a hexagonal horizontal outline, which provides close packing of the modules. In Fig. 3E the modules have a square configuration, which also permits close packing. The patterns are well-suited for multiple-beam generation and phased-array beam steering. It should be noted that, in all of the foregoing transducer embodiments, any electrical crosstalk among electrodes can be mitigated by placing so-called "guard tracks" between the power electrodes. It should also be appreciated that transducers having multiple electrical (but not necessarily acousto-mechanical) resonances can be employed to increase the efficiency of amplification over a wide bandwidth.

[0026] In Fig. 4 I have illustrated a drive unit 27 for efficiently driving a transducer module 12 or an array of modules. The drive unit includes an amplifier 61 whose output is applied to a step-up transformer 62. The secondary voltage of the transformer is applied to the series combination of one or more transducers in a module 12, a resistor 63 and a blocking capacitor 64. At the same time electrical bias is applied to the module from a bias source 66 by way of an isolating inductor 68 and resistor 70. The capacitor 64 has a very low impedance at the frequency of operation and the inductor 68 has a very high impedance. Accordingly, these components have no effect on the operation of the circuit except to isolate the AC and DC portions from each other. If desired, inductor 68 can be replaced with a very large resistor.

[0027] The secondary inductance of the transformer 62 is preferably tailored to resonate with the capacitance of the module 12 at the frequency of the acoustical-mechanical resonance frequency of the transducers driven by the units 27, i.e., 60 kHz or higher. This effectively steps up the voltage across the transducer and provides a highly efficient coupling of the power from the amplifier 27 to the module 12. The resistor 63 provides a measure of dampening to broaden the frequency response of the drive circuit.

[0028] It will be understood that one can use a transformer 62 with a very low secondary inductance and add an inductor in series with the transducer to provide the desired electrical resonant frequency. Also, if the transformer has an inductance that is too large to provide the desired resonance, one can reduce the effective inductances by connecting an inductor parallel with the secondary winding. However, by tailoring the secondary inductance of the transformer I have minimized the cost of the drive circuit as well as its physical size and weight.

[0029] When a transducer module or array includes transducers having different resonance frequencies as described above, it is preferable, though not necessary to use separate drive circuits tuned to the respective resonance frequencies. Such an arrangement is illustrated in Fig. 5. The output of the modulator 26 is applied to a frequency splitter 74, which splits the modulated ultrasonic signal into upper and lower frequency bands corresponding to the resonance frequencies of high-frequency transducers 75 and low frequency transducers 76, respectively. The upper frequency band is passed through a drive circuit 27a tuned to the mechanical resonance frequency of the transducers 75 and the resonant frequency of the drive circuit 27b corresponds with the mechanical resonance of the low frequency transducers 76.

[0030] The spacers 34 (Fig. 2A) and 54 (Fig. 3A), can be metallic spacers suitably insulated from the conducting surface of the membranes 38 and 50 and/or the conductors on the electrode units 32 and 52. However, dielectric spaces are preferred, since they permit the use of higher voltages and thus more powerful and linear operation of the transducers.

[0031] In Fig. 6A I have illustrated of transducer module 90, incorporating piezo-active membranes (e.g., polyvinylidene fluoride (PVDF) films that are inherently piezoelectric). Metallic film on opposite surfaces are used to apply alternating electric fields to the piezoelectric material and thus cause it to expand and contract. The PVDF films have previously been used in sonic transducers, most efficiently by operating the piezoelectric material in the transverse mode. Specifically, the membrane is suspended on a support structure containing multiple cavities. In accordance with known approaches, a vacuum is applied to the cavities to provide a biasing displacement of the membrane into the cavities. The alternating voltage applied to the membrane causes the membranes to expand and contract transversely to the applied field, causing the membrane to move back and forth against the vacuum bias.

[0032] I have found these PVDF transducer modules to be highly suitable for parametric sound generation. However, a shortcoming of the prior PVDF transducer modules is the necessity of maintaining a vacuum, which may be unreliable in the long run.

[0033] The transducer module 82 in Fig. 6A employs an electric field to bias the transducers. A PVDF membrane 84 is suitably attached to a perforated top plate 86 and spaced above a conductive bottom electrode 88. A DC bias, provided by a circuit 92, is connected between the electrode 88 and a conductive surface 84a of the membrane, thereby urging the membrane into the apertures 96 in the plate 86. This provides a reliable mechanical bias for the membrane 84 so that it can function linearly to generate acoustical signals in response to the electrical outputs of the drive circuit 94. As described above in connection with Fig. 4, DC bias circuit 92 can include components that isolate it from the AC drive circuit 94.

[0034] For use in a parametric sound generator provided with broadband operation, as described above, the apertures 96 have different diameters, as shown, to provide different resonant frequencies for the individual transducers,

which comprise the portions of the membrane 84 spanning the apertures. One of the conductive surfaces on the membrane is patterned to provide electrodes that correspond with the apertures. The same surface is also provided with conductive paths that connect these electrodes to the circuits 92 and 94. Specifically, the electrodes can be patterned, as described for the electrostatic transducers of Figs. 2 and 3, in order to control the geometry and extent of the beam (for phasing, steering, absorption compensation, and resonant electrical driving and reception, etc.) and to facilitate driving at multiple resonances.

**[0035]** The module depicted in Fig. 6A is highly reliable, yet it provides all the advantages of PVDF transducers. Moreover, it is readily adaptable, as shown for multiple-resonant-frequency operation.

**[0036]** In Fig. 6B I have illustrated a PVDF transducer module 100, which is biased by means of a positive pressure source 102 connected to the cavity between the membrane 84 and a back plate 104, which may be of conductive or dielectric material. It uses the same electrical drive arrangement as the module 82 of Fig. 6A, except for the omission of DC biases. Ordinarily, it is more feasible to provide a reliable positive rather than negative pressure in a PVDF module. Alternatively, a positive or negative bias can be provided by employing a light but springlike polymer gel or other material between the membrane and the backplate.

**[0037]** Atmospheric demodulation of a parametric audio signal substantially boosts the high-frequency audio components, with a resulting amplitude response of about 12dB/octave. This characteristic has been compensated by a corresponding use of a low-frequency emphasis filter for de-emphasis of the audio signal prior to preprocessing. However, I prefer to provide compensation by using transducers that have an appropriate frequency response. Specifically, rather than providing a transducer response that is essentially flat over the frequency range of the transmitted signals, I prefer to provide the transducers with an essentially triangular response centered on the carrier frequency, assuming double-sideband modulation. The transducer modules described above provide this response when configured for multiple-resonant-frequency operation as depicted. A re-emphasis filter may be used to correct for the non-uniform transducer response.

**[0038]** Fig. 7 illustrates the use of a parametric sound generator in connection with a wall 110 against which the beam 112 from a transducer array 114 is projected. The wall may have a surface 110a that is relatively smooth and thus provides specular reflection at both the ultrasonic and audio frequencies. In that case the projected beam 112 is reflected, along with the sonic content of the beam, as indicated at 116.

**[0039]** Alternatively, the front surface 110a of the wall may be of a material or structure that absorbs ultrasonic energy and reflects audio energy. In that case, there will be no reflected beam. Rather there will be a relatively non-directional source of audio signals from the area in which the beam 112 strikes the wall. Accordingly, if at the same time a moving visual image is projected against the wall by a projector 119, the beam 112 may be made to track the image so that the sound always appears to emanate from the image. The same effect may be provided by using a surface that has irregularities that diffusely reflect the ultrasonic energy. In either case the projected beam can have relatively high ultrasonic energy levels, which results in more audible energy, without causing reflections having a dangerously high ultrasonic intensity. The beam 112 and projector 119 may be coupled for common steering by servomechanism (not shown) or by the use of a common reflective plate (not shown) to provide the desired image tracking; alternatively, the beam may be steered using a phased array of transducers. The wall may also be curved as to direct all audible reflections to a specific listening area.

**[0040]** In still another alternative, the wall 110 may reflect light but be transparent to sound, allowing the sound to pass through wall 110 (to be reflected, for example, from a different surface). The important point is that the sonic and light-reflecting properties of wall 110 may be entirely independent, affording the designer full control over these parameters in accordance with desired applications.

**[0041]** The system depicted in Fig. 7 may also include equipment for controlling atmospheric conditions such as temperature and/or humidity; I have found that the efficiency of demodulation of beam energy to provide audible signals is a direct function of such conditions. A device 120, which may be, for example, a thermostatically controlled heater, a moisture generator and/or a dehumidifier, maintains the desired condition along the path traversed by the ultrasonic beam 84. For example, in cases where the atmosphere would otherwise have a low relative humidity, it will often be desirable to inject moisture into the atmosphere; in general, it is desirable to avoid relative humidities on the order of 20-40%, where absorption is maximum. Other agents, such as stage smoke, may also be injected into the atmosphere to increase the efficiency of demodulation.

**[0042]** In order to provide deep bass content in the audio signals, the outputs of the audio sources 20 (Fig. 1) may be applied to a woofer (i.e., a low-frequency speaker) 121. Inasmuch as the very low frequencies do not contribute to the directional effect of audio signals, the use of the woofer 121 ordinarily does not detract from the apparent movement of the sound source across the wall 110. Of course, woofer 121 should be positioned and/or controlled to avoid any perceptible adverse impact on the intended projection effect.

**[0043]** By using two or more ultrasonic beams one may position the apparent source of an audio signal as desired within a three-dimensional space. One or both of the beams are modulated with the audio signal. The individual modulated beams have an intensity below the level at which a significant audio intensity is produced. The beams are

directed to intersect each other, and in the volume in which the beams intersect, the combined intensity of the two beams is sufficient to provide a substantial audio signal. In this connection one should note that the strength of a demodulated audio signal is proportional to the square of the intensity of the projected ultrasonic beam. The audio signal thus appears to emanate from that volume and one may therefore move the apparent audio source throughout a three-dimensional space by shifting the intersection of the beams. Indeed, by controlling the interference of two or more beams, it is possible to change the size, shape, and extent of the sound source.

[0044] A parametric generator providing this function is illustrated in Fig. 8. A pair of ultrasonic transducer arrays 122 and 123, that operate as described above, are supported by steering mechanisms 124 and 125 that provide independent steering of the beams 126 and 127 projected by the arrays 122 and 123. The beams intersect in a volume 128 which is the apparent source of an audible signal resulting from non-linear interaction of the ultrasonic energy within the volume. The steering mechanisms are controlled by a controller (not shown) to steer the beams 126 and 127 and thereby move the beam interaction volume 128 to various desired locations. This approach is useful not only to create an apparent source of sound, but also to confine the audio signal to a specific region or to a specific audience (which may be moving) without disturbing others. In such "directed audio" applications, it can prove useful to employ absorbing surfaces to reduce unwanted audio reflections in the vicinity of the directed beams.

[0045] Beams 126, 127 (generated as separate beams or as a split beam) can also each be directed to one of the listener's ears to produce stereophonic or binaural audio. In this case, each of the beams 126, 127 is modulated with a separate stereo or binaural channel; in the latter case, maintaining the binaural illusion may require awareness of the position of the listener in creating the audio signals.

[0046] When a low-level audio signal is to be reproduced, it is undesirable to simply allow the modulation depth to remain small, while maintaining a high-energy ultrasound beam, as in prior systems. Instead, it is preferred to maintain a modulation depth near unity by adapting the amplitude of the carrier in response to changes in the audio signal level. This assures maximum efficiency of the system, and automatically inhibits the transmission of ultrasound when the incoming audio is absent.

[0047] A suitable adaptive system is depicted in Fig. 9. An audio input is provided by a source 130, which may also include de-emphasis, depending on the transducer characteristics as described above. The output of the source 130 is applied to a peak-level sensor 133 and to a summer 132, which also receives the output of the sensor 133.

[0048] The output of the summer 132 is applied to a square-root circuit 137 and the resulting audio signal multiplies the carrier in a modulator-multiplier 138. The modulated carrier may be amplified by an amplifier 139 before passing to a transducer driver circuit. Some or all of the functions of the circuit elements in Fig. 9 may, of course, be accomplished by means of one or more suitably programmed digital signal processors and associated circuitry.

[0049] More specifically, a parametric system creates an audible secondary beam of sound by transmitting into the air a modulated, inaudible, primary ultrasonic beam. For a primary beam described by:

$$p_1(t) = P_1 E(t) \sin(\omega_c t) \quad (1)$$

where  $P_1$  is the carrier amplitude and  $\omega_c$  is the carrier frequency, a reasonably faithful reproduction of an audio signal  $g(t)$  can be obtained when:

$$E(t) = \left( 1 + \iint m g(t) dt^2 \right)^{1/2} \quad (2)$$

where  $m$  is the modulation depth, with  $g(t)$  normalized to a peak value of unity. The resulting audible beam  $p_2(t)$  is then known to be:

$$\begin{aligned} p_2(t) &\propto P_1^2 \frac{d^2}{dt^2} E^2(t) \\ &\propto P_1^2 m g(t) \\ &\propto g(t) \end{aligned} \quad (3)$$

[0050] When there is no audio signal ( $g(t)=0$ ),  $E(t) = 1$ , the primary beam  $p_1(t) = P_1 \sin(\omega_c t)$  continues with transmission of the ultrasonic carrier. This silent ultrasound beam serves no purpose, and wastes energy. It may also be a hazard: a pure-tone sound is generally, at least for audible sound, more dangerous than a wideband sound (with energy

spread throughout), and as there is nothing audible, listeners are not aware that they are being subjected to energetic ultrasound.

[0051] The circuit of Fig. 9 controls both the modulation depth and overall primary amplitude  $P_1$ , thereby to (a) maximize the modulation depth (while keeping it at or below some target, usually 1); (b) maintain an audible level corresponding to the level of the audio signal  $g(t)$  by adjusting  $P_1$  appropriately; and (c) ensure that when there is no audio, there is little or no ultrasound. These functions are accomplished by measuring the peak level,  $L(t)$ , of the integrated (i.e., equalized) audio signal and synthesizing the transmitted primary beam  $p'(t)$  as

$$p'(t) = P_1 \left( L(t) + m \int g(t) dt^2 \right)^{1/2} \sin(\omega_c t) \quad (4)$$

where  $L(t)$  is the output of the level sensor 133 and the quantity  $L(t) + m \int g(t) dt^2$  is the output of the summer 132. The square root of the latter quantity is provided by the square root circuit 137, and the final multiplication by  $P_1 \sin(\omega_c t)$  is provided by the multiplier 138.

[0052] The output,  $p'(t)$ , of the multiplier 138, as defined by formula (4), can also be provided by means of a conventional amplitude modulator, with both  $P_1$  and the level of the audio signal applied to the modulator being controlled according to the peak level of  $g(t)$ . To obtain a demodulated audio signal whose level is proportional to that of  $g(t)$ , the level-control signal would be proportional to the square-root of the value of peak  $g(t)$ . The preferred embodiment of the invention, depicted in Fig. 9, provides a simple, more direct mechanism to accomplish this result. In this connection, it should be noted that the square-root circuit 137 provides the dual functions of preconditioning the audio signal for reduction of intermodulation distortion and providing the square-root of  $L(t)$ .

[0053] Atmospheric demodulation of the ultrasonic signal results in an audio signal  $p'_2(t)$  given by

$$\begin{aligned} p'_2(t) &\propto \frac{d^2}{dt^2} E^2(t) \\ &\propto \frac{d^2}{dt^2} \left( L(t) + m \int g(t) dt^2 \right) \\ &\propto \frac{d^2 L(t)}{dt^2} + mg(t) \end{aligned} \quad (5)$$

This signal thus includes the desired audio signal  $mg(t)$  and a residual term involving the peak-detection signal  $L(t)$ . The audible effect of the residual term can be reduced to negligible proportions by applying a relatively long time constant to  $L(t)$  and thereby materially reducing the second derivative in formula (5). This, however, will result in over-modulation, and resulting unacceptable distortion, when the audio signal level suddenly increases. Accordingly, the peak level detector is provided with an essentially zero time constant for increases in  $g(t)$  peak and a slow decay (long time constant) for decreases in  $g(t)$  peak. This reduces the audible distortion from the first term of formula (5) and shifts it to very low frequencies. At the same time it provides a carrier level no greater than that required to transmit a modulated beam with a desired modulation depth  $m$ .

[0054] When there are established safety measures regarding ultrasound exposure, the control system of Fig. 9 can be augmented to automatically eliminate the possibility of exceeding allowable exposure. For example, if different members of the audience are at different distances from the transducer, the output power level must be adjusted to provide the closest listener with a safe environment. In such situations, it can be useful to determine the distance between the transducer and the closest audience member, and use this distance to control the maximum allowed ultrasound output so that no listener is subjected to unsafe exposure. This may be achieved with a ranging unit 140, which determines the distance to the nearest listener and adjusts the output (e.g., through control of amplifier 139) accordingly.

[0055] Ranging unit 140 can operate in any number of suitable ways. For example, unit 140 may be an ultrasonic ranging system, in which case the modulated ultrasound output is augmented with a ranging pulse; unit 140 detects return of the pulse and, by measuring the time between transmission and return, estimates the distance to the nearest object. Alternatively, rather than sending out a pulse, correlation ranging may be used to monitor the reflections of the transmitted ultrasound from objects in its path, and the echo time estimated by cross-correlation or cepstral analysis. Finally, it is possible to utilize infrared ranging systems, which have the advantage of being able to discriminate between warm people and cool inanimate objects.



**[0056]** It is also possible to compensate for distortion due to atmospheric propagation. The absorption of sound in air is highly dependent on frequency (approximately proportional to its square). While the carrier frequency employed herein is preferably centered near 65 kHz to minimize absorption, the signal is nonetheless wideband ultrasound spanning a range of frequencies that are absorbed to varying extents. Higher ultrasonic frequencies are absorbed more strongly than the lower frequencies, resulting in audible distortion in the demodulated signal. This effect can be mitigated by selectively boosting the ultrasonic output in a frequency-dependent manner that compensates for the nonuniform absorption.

**[0057]** As described in Basset et al., *J. Acoust. Soc.* **97**(1):680-683 (Jan. 1995), atmospheric absorption of sound depends not only on frequency but also on the temperature and humidity of the air; moreover, the overall amount of decay is also affected by on the propagation distance (almost, but not quite, leveling out at far distances). Accordingly, precise compensation would require sensing and adjusting for these parameters. But satisfactory results can be obtained by making assumptions of average conditions (or measuring the average conditions for a particular environment) and basing a compensation profile on these. Thus, as illustrated in FIG. 10A, the absorption (in terms of attenuation in dB) of four different frequencies of ultrasound differs perceptibly, with the highest frequency  $f_4$  being absorbed most strongly (and therefore decaying most rapidly). The present invention creates an acoustic field that compensates for this frequency-based nonuniformity.

**[0058]** In a preferred approach, the modulated signal is passed through an equalizer 142, which adjusts the signal amplitude in proportion to the expected amount of decay, e.g., at an assumed or actual distance. As a result, the curves shown in FIG. 10A are brought closer together as illustrated in FIG. 10B (with the greatest power boost applied to the highest frequency  $f_4$ ); while the overall rate of decay is not altered, it is not nearly as frequency-dependent (and therefore audibly distortive). Of course, compensation may also be introduced for the absolute amount of decay using ranging unit 140, since with frequency dependence largely corrected, decay is based primarily on the distance to the listener.

**[0059]** The correction applied by equalizer 142 may be further refined through the use of a humidity and temperature sensor 144, the output of which is fed to equalizer 142 and used to establish the equalization profile in accordance with the known atmospheric absorption equations.

**[0060]** Equalization correction is useful over a wide range of distances, i.e., until the curves diverge once again. In such circumstances, it is possible to improve correction-albeit at the cost of system complexity-using beam geometry, phased-array focusing, or other technique to actually change the amplitude distribution along the length of the beam in order to compensate more precisely for absorption-related decay.

**[0061]** It should be noted that the ultrasonic transducers described earlier can be used for the reception of audible or ultrasonic signals in addition to their transmission. As shown in Fig. 11, a transducer module or array 160 is powered, as described above, from one or more driver circuits 27. A high-pass filter 162, connected between each driver circuit 27 and the array 160 prevents dissipation of received audio energy in the driver circuits. A low-pass filter 164 passes audio energy from the array 160 to an audio-responsive unit 166 such as an amplifier and loudspeaker.

**[0062]** Assuming linear operation of the transducers in the array, the audio signals will suffer insubstantial distortion. Alternatively, a multiple-frequency arrangement with multiple electrodes, such as described above, can be used, with transducers that respond in the audio range being used for audio reception without the need for filtering. This allows full-duplex transduction on the same surface, which is difficult with traditional transducers, as well as phased-array reception, providing both a directional transmitter and receiver system.

**[0063]** Although the foregoing discussion highlighted various specific applications of the invention, these are illustrative only. The invention is amenable to a wide variety of implementations for many different purposes. Additional applications include, but are not limited to, creation of entertainment environments (e.g., the use of projected audio to cause the sounds of various musical instruments to appear in specific and changing places about a room, such as locations where visual images of the instruments are projected; or to direct sound to particular audience members; or to give an audience control over the apparent source of sound in interactive sequences; or to provide exact sound placement from home entertainment systems, e.g., in response to cues encoded in recordings and specifying sound pans and/or placement directions; or to steer the beam low to reach children but not their parents); store displays (e.g., directing sound at a displayed item); trade show promotions (e.g., to guide participants through the show or to different booths); military and paramilitary applications (e.g., phantom troops or vehicles to confuse the enemy; directed messages to enemy troops or populations; highly directed bullhorns for police to target alerts to suspects without alarming bystanders); office applications (e.g., to confine sound to particular work cubicles); address systems in public places (e.g., paging systems for arenas where listener locations are known, so that the parametric beam may be directed solely to the occupant of a particular seat without disturbing nearby audience members; or to particular tables in restaurants; or to deliver announcements or warnings in public places, e.g., to pedestrians about to dismount escalators or approaching dangerous areas; or to help direct blind persons; or, with the transducer configured as a ring surrounding a spotlight, following the light beam so sound emanates from an illuminated object); toys (e.g., devices that emanate highly directed whispers or noises such as smashing glass or gunfire); repelling animals; applications whereby sound is projected onto a surface some distance away from an apparent source in order to maintain synchro-

nization between the sound and images; and personal audio sources (e.g., to create individual listening on airplanes, replacing headphones).

[0064] It will therefore be seen that I have developed a highly versatile and efficient system for delivering audio via modulated ultrasonic radiation. The terms and expressions employed herein are used as terms of description and not of limitation, and there is no intention, in the use of such terms and expressions, of excluding any equivalents of the features shown and described or portions thereof, but it is recognized that various modifications are possible within the scope of the invention claimed.

## Claims

### 1. A parametric audio generator comprising:

- (a) an ultrasonic signal source (18) providing a carrier;
- (b) a source (20<sub>1</sub>-20<sub>N</sub>) of audio signals;
- (c) means (26) for modulating the carrier with the audio signals, the frequency of the carrier being sufficiently high that all of the components of the modulated carrier have frequency above the range in which the human auditory system responds;
- (d) at least one ultrasonic transducer (10,12;75,76) for radiating ultrasonic signals; and
- (e) means (16,27;27a,27b,74) for applying the modulated carrier to the or each transducer.

### 2. The parametric audio generator of Claim 1, including first and second ultrasonic transducers (12;75,76), said first transducer having a first acoustical-mechanical resonance and said second transducer having a second acoustical-mechanical resonance at a frequency higher than that of said first transducer;

wherein the frequency spectrum of the modulated carrier includes both of said transducer resonances.

### 3. The parametric audio generator of Claim 2 including:

- (a) means (74) for splitting the modulated carrier into upper and lower frequency-range signals;
- (b) means (27b) for driving said first transducer (76) with said lower frequency range signal; and
- (c) means (27a) for driving said second transducer (75) with said upper frequency range signal.

### 4. The parametric audio generator of Claim 2 or Claim 3 wherein:

- (a) each of said transducers (12;75,76) has an electrically capacitive element to which the signal for that transducer is applied, and
- (b) each of said driving means (27;27a,27b) includes an inductor conducted to resonate with the capacitive element of the transducer driven by the driving means, thereby to provide an electrical resonance corresponding with the acoustical-mechanical resonance of the transducer.

### 5. The parametric generator of any of Claims 1-4, wherein each of said transducers (12;75,76) has a pair of electrodes to which electrical signals are applied, said electrodes being characterised by a capacitance between them, and including a drive circuit (27;27a,27b) for applying signals from said generator to said transducer, said drive circuit including an inductance (68) in series with said capacitance and resonating with said capacitance at said mechanical resonance frequency.

### 6. The parametric audio generator of Claim 5 wherein each of said transducers is either a capacitance membrane-type transducer (29;43) or a piezoelectric transducer (82,100).

### 7. The parametric audio generator of any of Claims 1-6, the transducer transmitting a modulated acoustical beam, further comprising:

- (a) a preprocessor (22) for conditioning the output of the source to compensate for cross-modulation of audio components in the acoustical beam; and
- (b) means (24) for combining output of said audio signal source with the output of said preprocessor and applying the resulting combined audio signal to said modulator.

8. The parametric audio generator of any of Claims 1-7, further comprising:  
a signal control unit comprising:

(i) a level sensor (133) sensing the audio signal level from said audio source; and  
(ii) means (132,137) for controlling the intensity of the carrier in response to the sensed audio signal level.

9. The parametric audio generator of Claim 8, the modulated carrier signal having a modulation depth, wherein the control means (132,137) includes means for controlling the depth of modulation of the carrier in response to the sensed audio signal level.

10. The parametric audio generator of any of Claims 1-9, further comprising means (142,144) for compensating for distortion arising from atmospheric propagation and absorption of the radiated ultrasonic signals.

11. The parametric audio generator of Claim 10, wherein the compensating means is an ultrasonic equalizer (142) applying compensation based on at least one of (a) an assumed distance, (b) airborne humidity level, (c) temperature, and (d) an amplitude of the modulated carrier.

12. The parametric audio generator of Claim 11, further comprising means (144) for sensing at least one of temperature and airborne humidity.

13. The parametric audio generator of any of Claims 1-12, further comprising means for controlling the output of the transducer to avoid subjecting listeners to unsafe output levels.

14. The parametric audio generator of Claim 13, comprising means (140) for determining a distance to a listener, the compensating means being responsive to the distance-determining means (140) and determining a compensation level based thereon.

15. A parametric audio system comprising:

(a) a parametric audio generator as claimed in any of Claims 1 to 14 transmitting an audio-modulated beam (112) into a closed atmosphere; and  
(b) an environmental control apparatus (120) for controlling at least one of temperature and moisture content of the atmosphere in the path of said beam, thereby to increase the efficiency of demodulation of the audio signal.

16. A parametric audio system comprising:

(a) a plurality of parametric audio generators (122,123) transmitting steerable audio-modulated ultrasonic beams; and  
(a) means (124,125) for steering said beams to provide an atmospheric volume in which the beams intersect, the combined intensity of the beams in said volume providing a demodulated audio signal having a substantially greater level than the level provided by demodulation of a single one of said beams.

17. A display system comprising:

(a) a light-reflecting surface (110a);  
(b) a projector (119) for projecting a moving optical image onto said reflecting surface (110a);  
(c) a steerable parametric audio generator for transmitting an audio-modulated ultrasonic beam (112); and  
(d) means for steering said audio generator to transmit the ultrasonic beam onto said light-reflecting surface (110a) at the location of said optical image, whereby the audio signals demodulated from the ultrasonic beam emanate from the location of the optical image.

18. The system of Claim 17, wherein the light-reflecting surface (110a) absorbs ultrasonic energy and reflects audio energy.

19. The display system of Claim 18, wherein the light-reflecting surface (110a) diffusively reflects ultrasonic energy.

20. A method of selectively transmitting audio signals to a selected location, the method comprising the steps of:

- (a) modulating an ultrasonic carrier with at least one audio signal, the frequency of the carrier being sufficiently high that all of the components of the modulated carrier have frequencies above the range in which the human auditory system responds; and
- (b) directing a beam containing the modulated carrier toward the location, whereby the audio signal appears to emanate therefrom or is confined thereto.

21. The method of Claim 20, wherein the carrier is generated by at least one capacitive ultrasonic transducer (75,76) having a mechanical resonance frequency, and further comprising the step of driving the at least one transducer with a driver (27a,27b) including an inductor coupled with the transducer capacitance to provide an electrical resonance corresponding to the mechanical resonance of the transducer.

22. The method of Claim 20, wherein the apparent source has a moving location, and further comprising the steps of:

- (a) tracking the location of the apparent source; and
- (b) responsively directing the beam toward the moving location.

23. The method of Claim 22, further comprising the step of continuously directing at least one visual image onto the moving location such that the audio signal appears to emanate from the at least one visual image.

24. The method of Claim 20, further comprising the step of either

- (i) utilizing, as an apparent source, a surface that absorbs or diffusely reflects ultrasonic energy and reflects audio energy, thereby creating a relatively non-directional source of audio signals from the apparent source, or
- (ii) utilizing, as an apparent source, a surface that specularly or diffusively reflects audio energy; and steering the apparent source to guide the reflected audio to a desired area.

25. The method of any of Claims 20-24, further comprising the step of:

- (a) directing a beam comparing the modulated carrier toward the location, whereby the audio signal appears to emanate therefrom or is confined thereto; and
- (b) controlling at least one atmospheric condition proximate to the location to increase demodulation efficiency.

26. The method of any of Claims 20-25, further comprising the step of:

- (a) providing a loudspeaker; and
- (b) causing the loudspeaker to reproduce low-frequency components of the audio signal.

27. The method of Claim 20, wherein the carrier has an audible amplitude and further comprising the step of adjusting the audible amplitude to maintain a modulation depth near a desired level, wherein the desired level is preferably unity.

28. The method of Claim 20, further comprising the step of at least reducing transmission of the carrier in response to amplitude reduction of the audio signal.

29. The method of any of Claims 20-28 further comprising the step of compensating for distortion arising from atmospheric propagation of the radiated ultrasonic signals.

30. The method of any of Claims 20-29, further comprising the step of controlling ultrasonic signals so as to avoid subjecting listeners to unsafe output levels.

31. The method of Claim 30 wherein the step of preventing subsection of listeners to unsafe power levels comprises;

- (a) determining a distance between the transducer and a listener and
- (b) controlling the output level based on the sensed distance.

32. A method of selectively transmitting audio signals to an acoustically isolated region, the method comprising the steps of:

(a) modulating each of a plurality of ultrasonic carriers with at least one audio signal, the frequency of the carriers being sufficiently high that all of the components of the modulated carrier have frequencies above the range in which the human auditory system responds; and  
5 (b) directing the modulated carriers so as to intersect in a selected region, the carriers having a combined intensity within the selected region such as to provide a demodulated audio signal having a substantially greater level than the audio level provided by demodulation of a single one of the modulated carriers, whereby the audio signal emanates from the selected region.

10

15

20

25

30

35

40

45

50

55

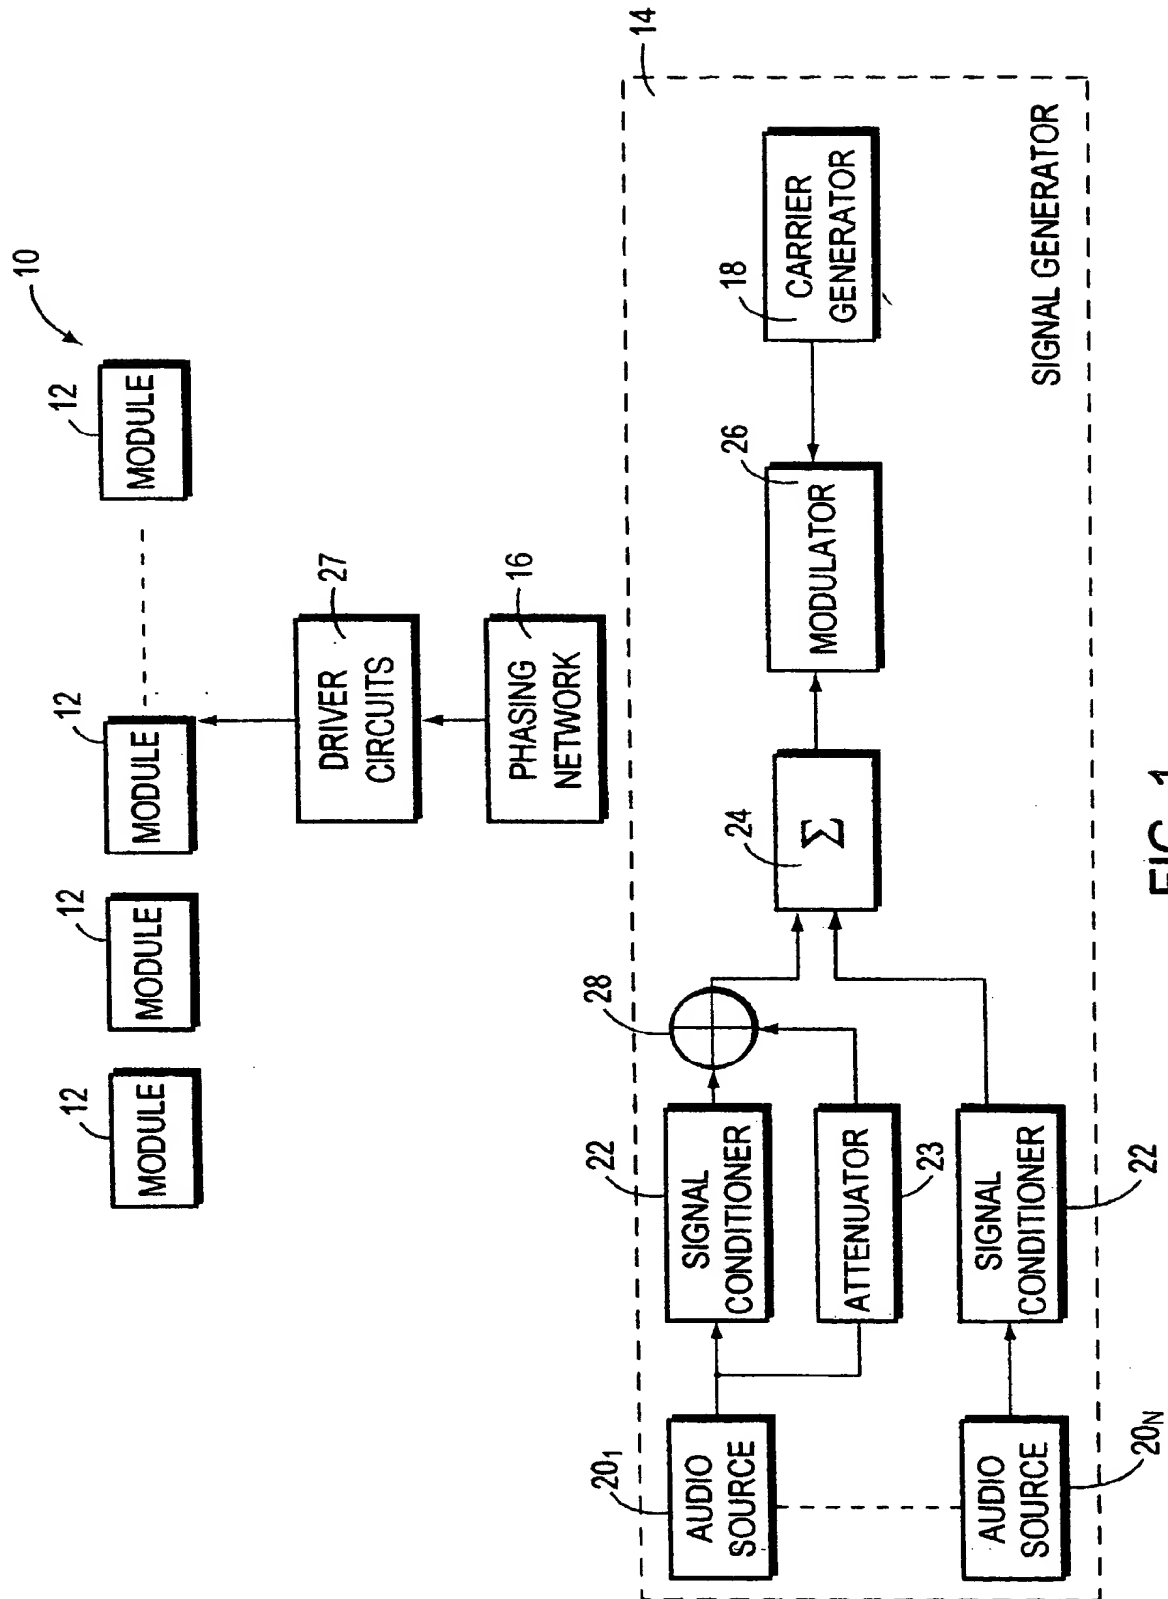


FIG. 1

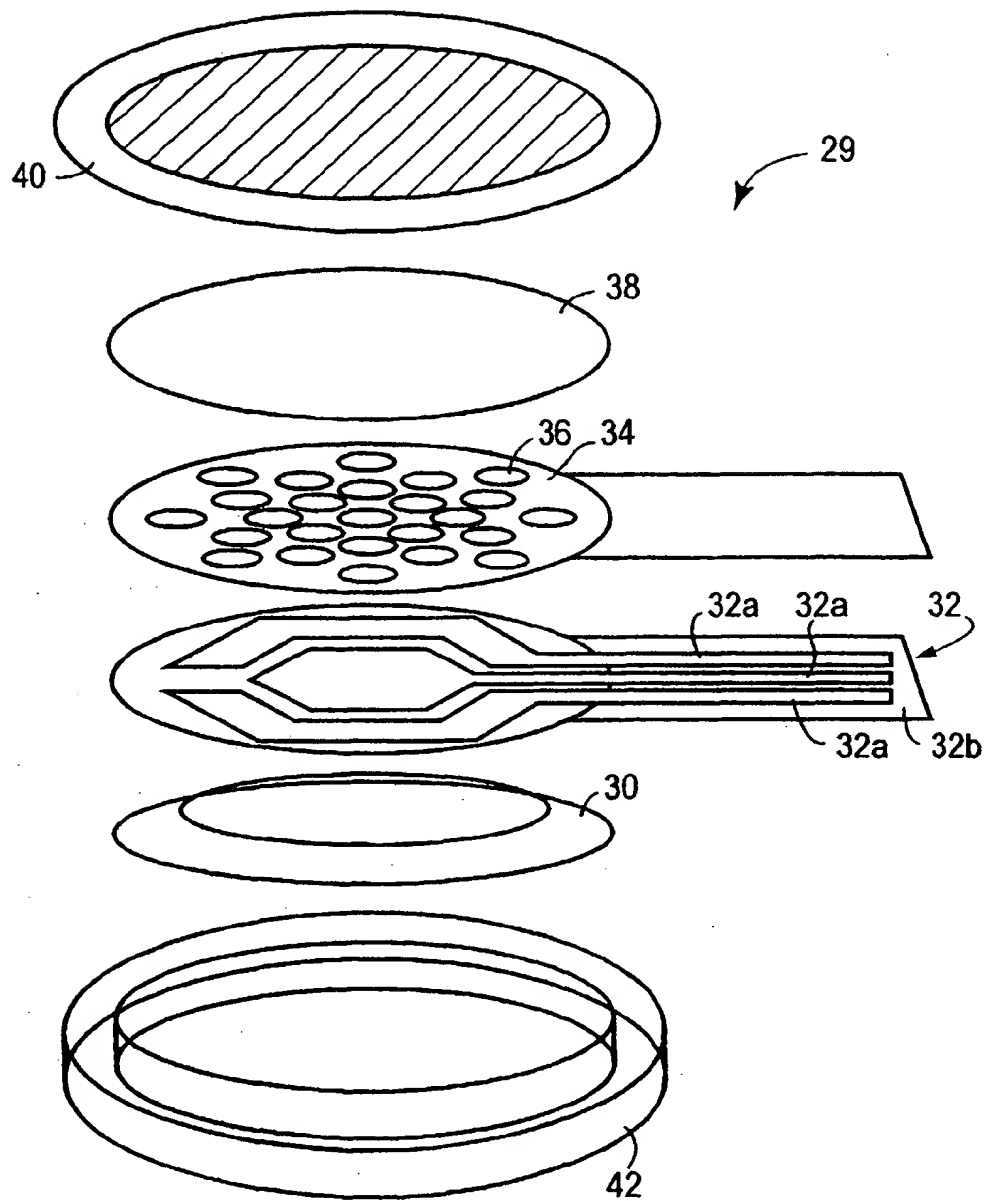


FIG. 2A

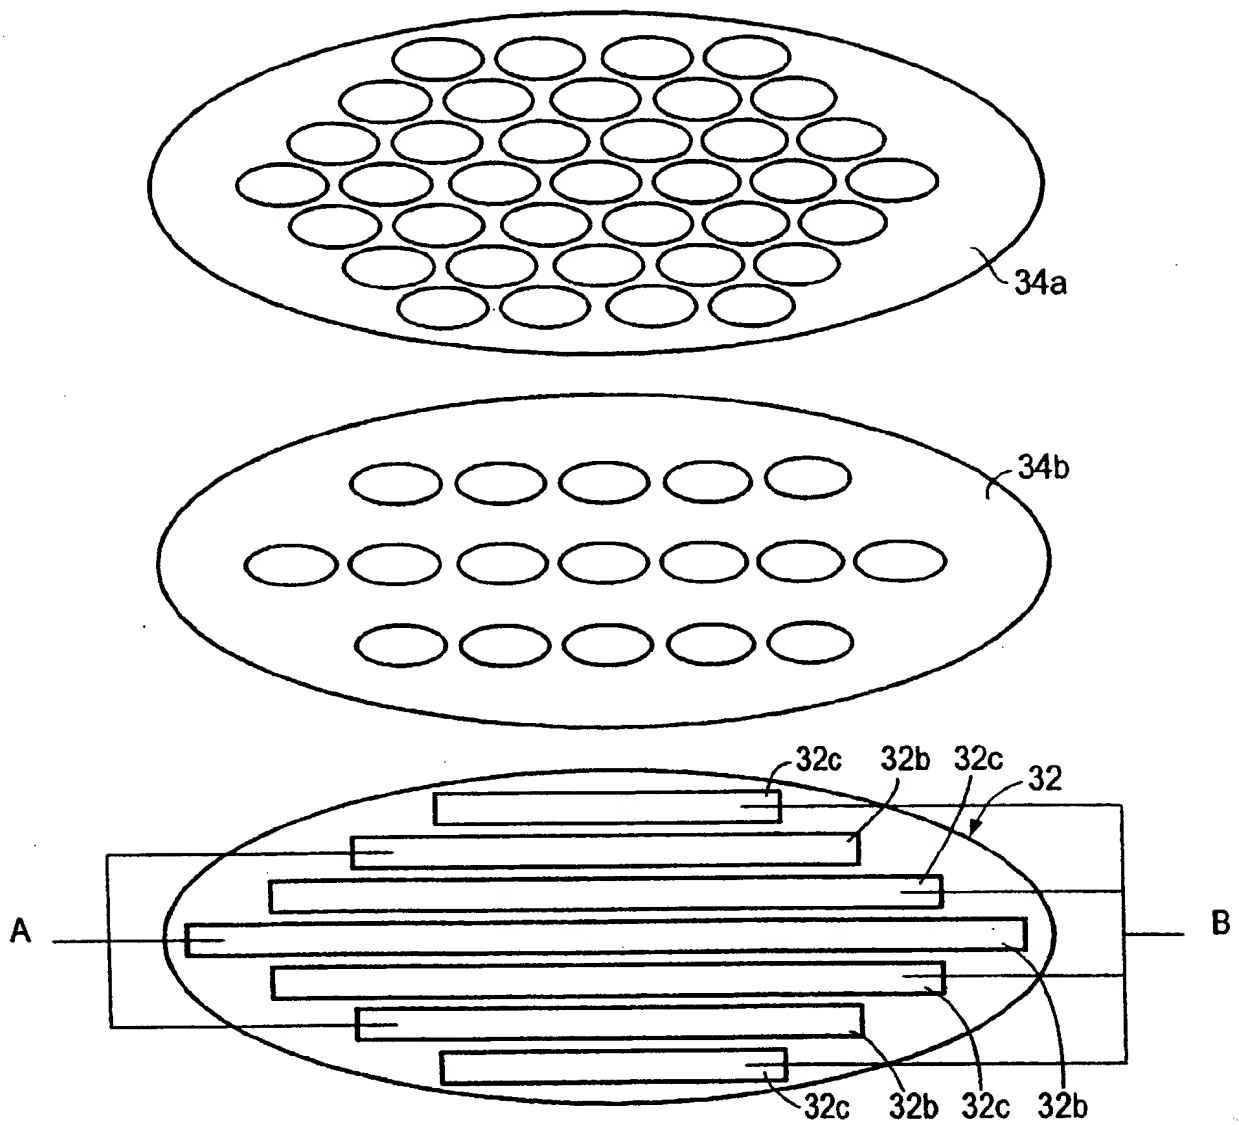


FIG. 2B



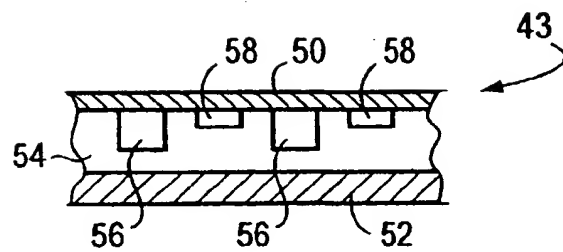


FIG. 3A

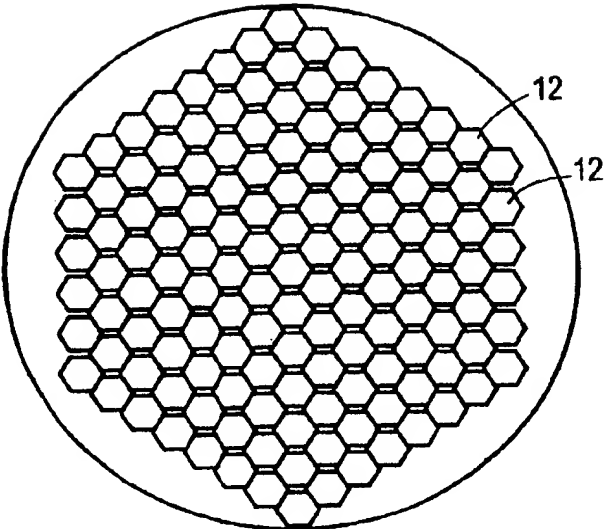


FIG. 3D

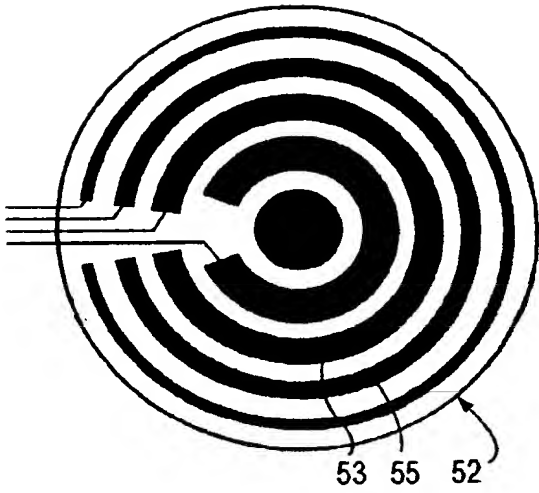


FIG. 3B

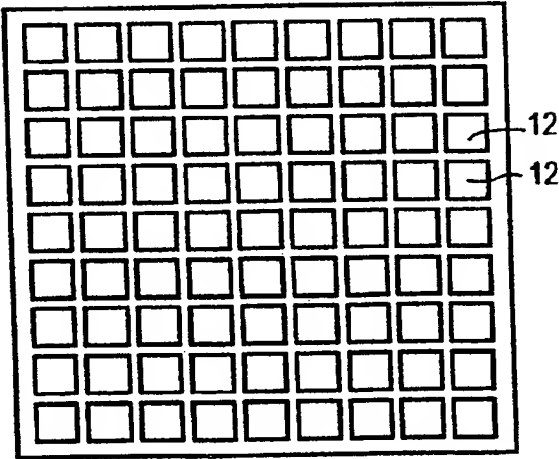


FIG. 3E

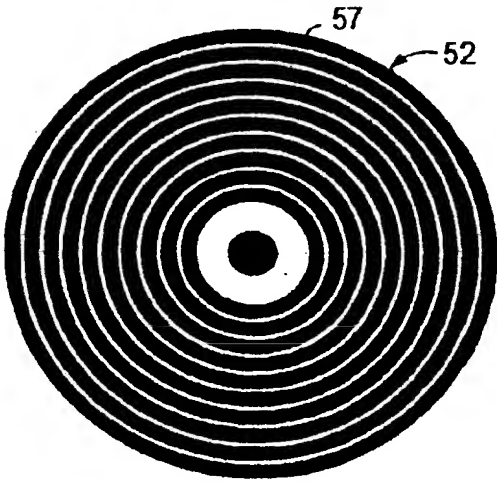


FIG. 3C

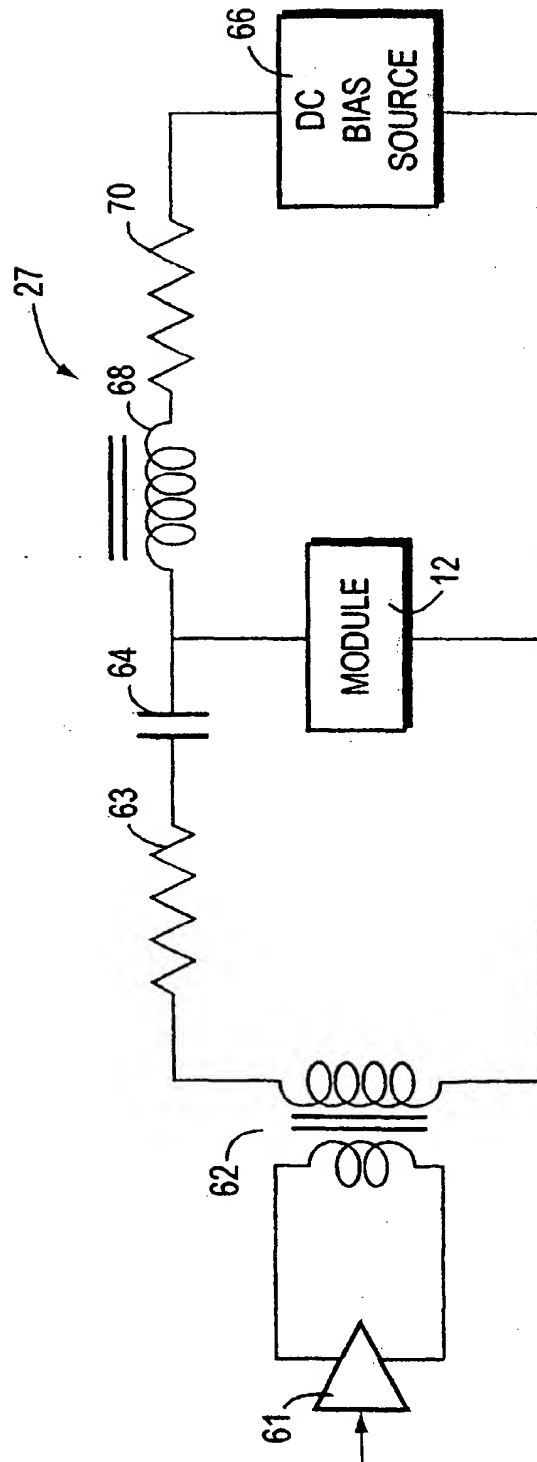


FIG. 4

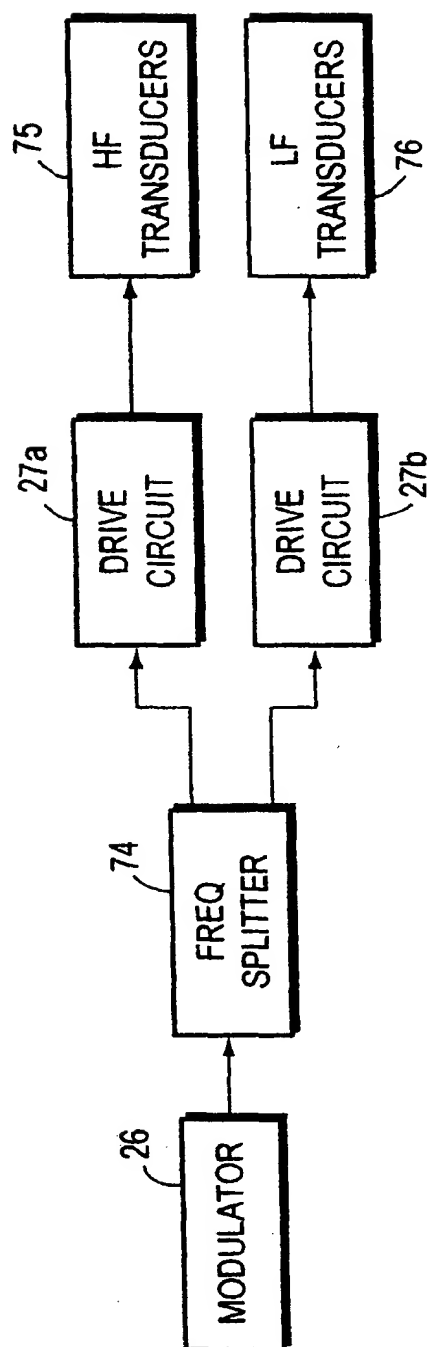


FIG. 5

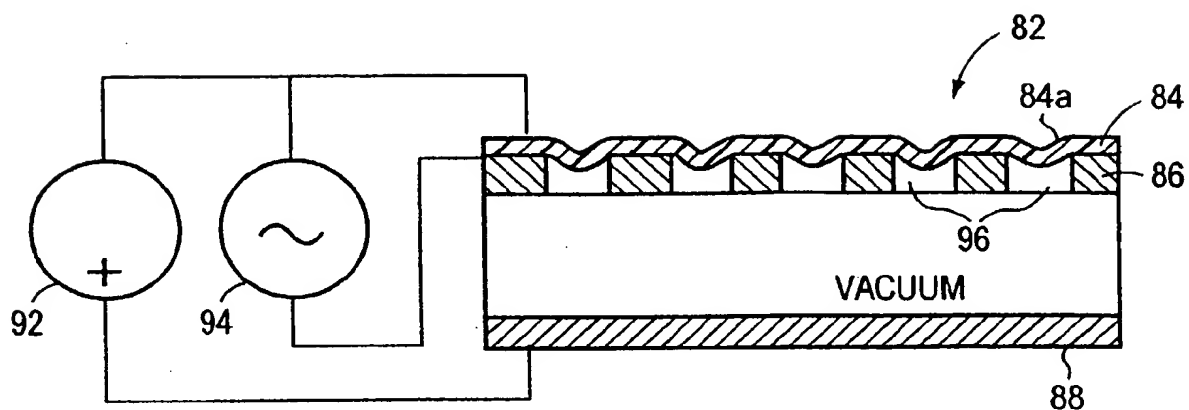


FIG. 6A

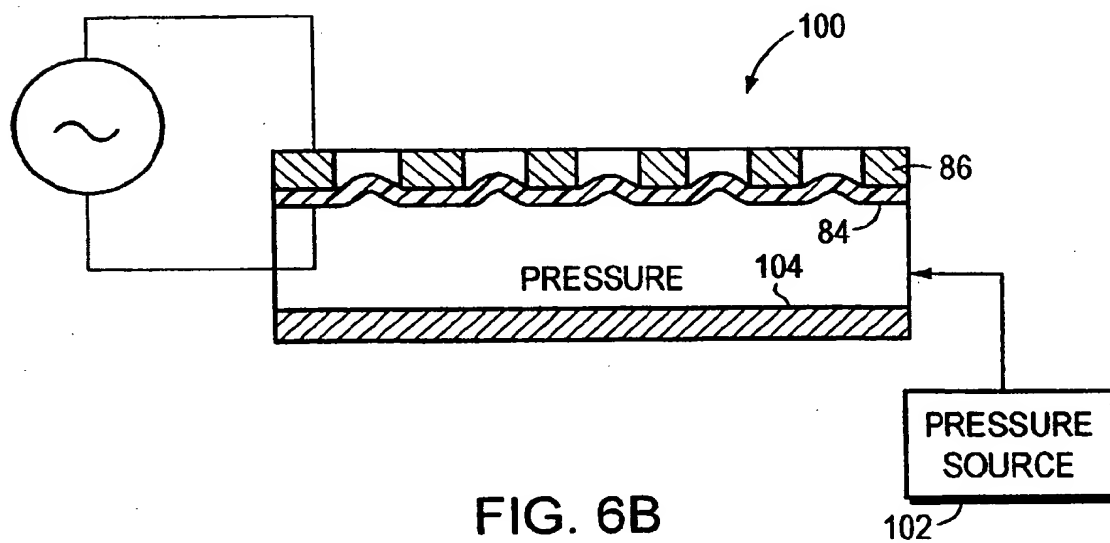


FIG. 6B

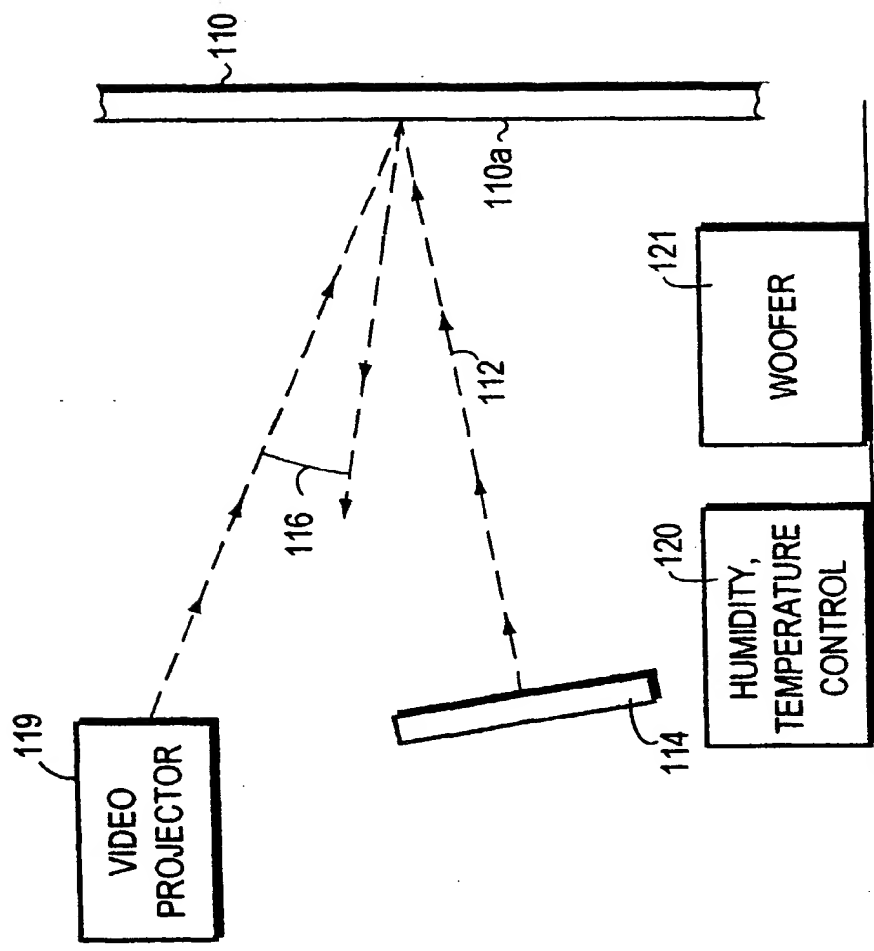


FIG. 7

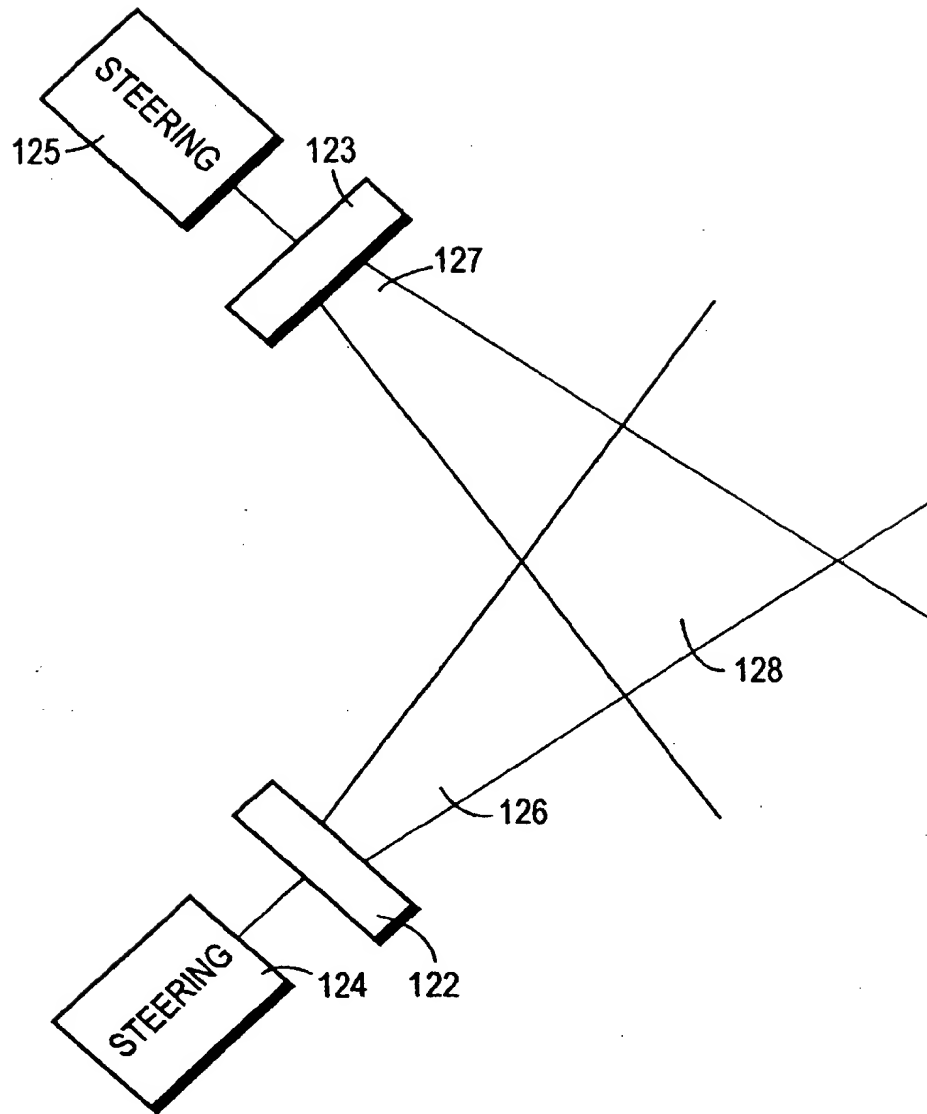


FIG. 8

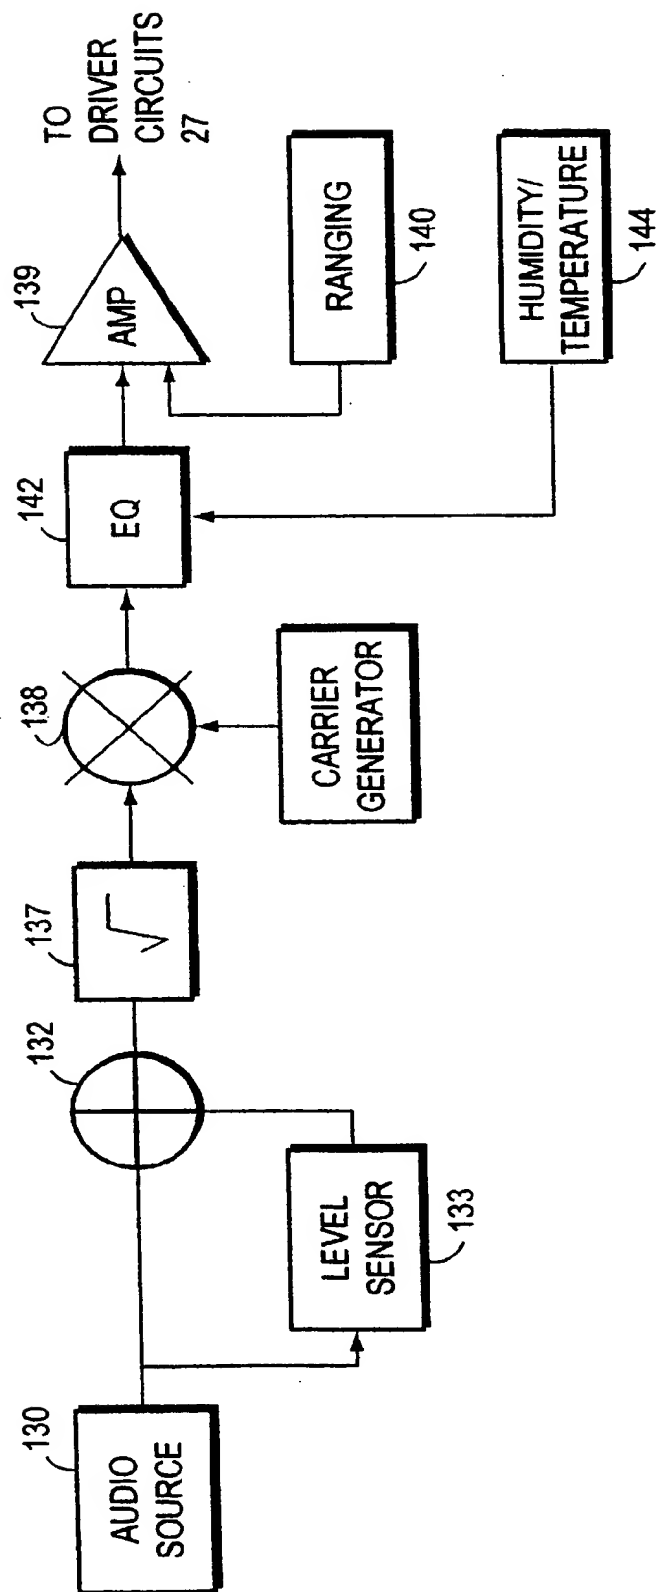


FIG. 9



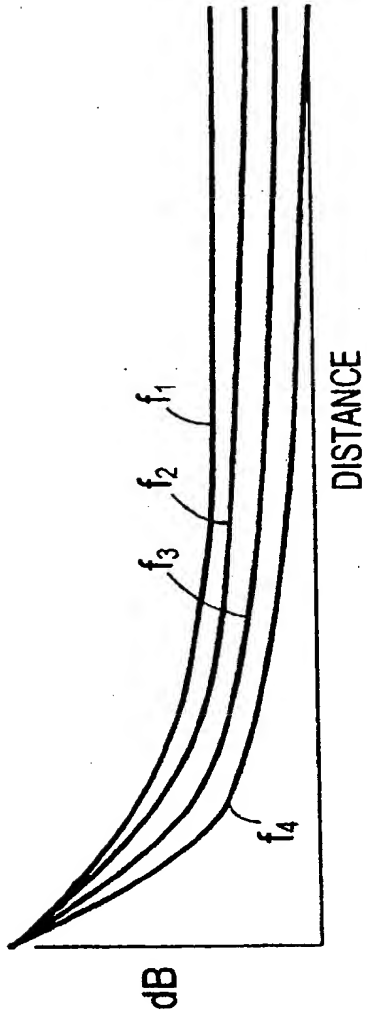


FIG. 10A

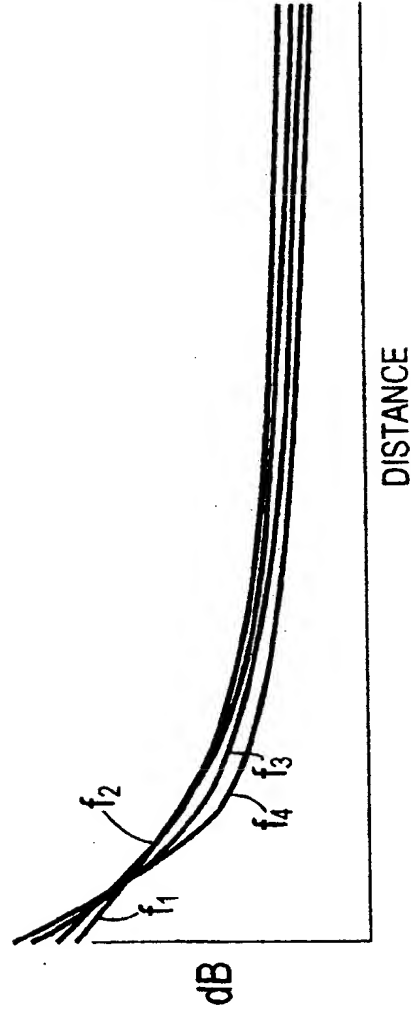


FIG. 10B

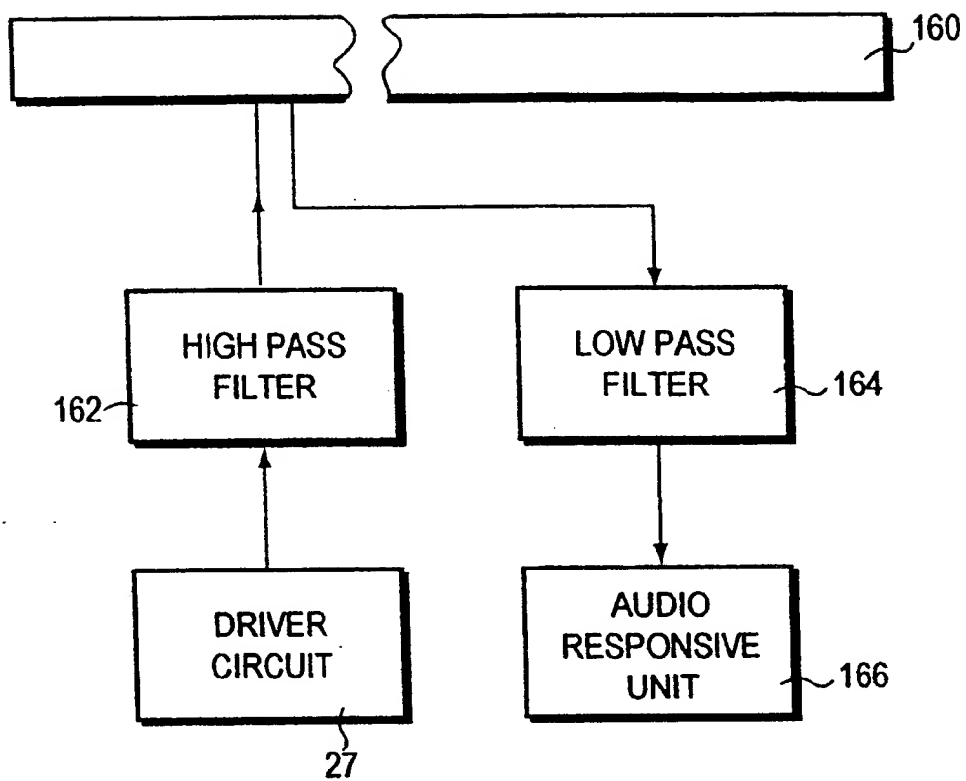


FIG. 11

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 973 152 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
03.01.2001 Bulletin 2001/01

(51) Int Cl.7: **G10K 15/02**, H04B 14/00,  
G10K 11/26

(43) Date of publication A2:  
19.01.2000 Bulletin 2000/03

(21) Application number: **99305632.4**

(22) Date of filing: **15.07.1999**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **Pompei, Frank Joseph**  
Cambridge, MA 02139 (US)


(74) Representative: **Carpenter, David**  
**MARKS & CLERK,**  
Alpha Tower,  
Suffolk Street Queensway  
Birmingham B1 1TT (GB)

(30) Priority: **16.07.1998 US 116271**  
**27.04.1999 US 300022**

(71) Applicant: **MASSACHUSETTS INSTITUTE OF  
TECHNOLOGY**  
Cambridge, MA 02139 (US)

(54) **"Parametric audio system"**

(57) Ultrasonic signals are used to transmit sounds from a modulated ultrasonic generator (14) to other locations from which the sound appears to emanate. In particular, an ultrasonic carrier is modulated with an audio signal and demodulated on passage through the atmosphere. The carrier frequencies are substantially higher than those of prior systems, e.g. at least 60 kHz, and the modulation products thus have frequencies which are well above the audible range of humans; as a result, these signals are likely to be harmless to individuals who are within the ultrasonic fields of the system. The signals may be steered to moving locations, and various measures are taken to minimise distortion and maximise efficiency.

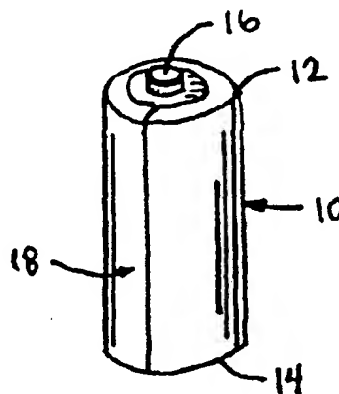

**Fig. 1**

**EP 0 973 152 A3**



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 99 30 5632

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 539 705 A (AKERMAN M ALFRED ET AL) 23 July 1996 (1996-07-23) * column 1, line 60 - column 2, line 56 * * column 6, line 26 - column 7, line 34 * * claim 1 *	1	G10K15/02 H04B14/00 G10K11/26
Y		10,15 5,6,8	
A			
X	US 4 823 908 A (TANAKA TSUNEO ET AL) 25 April 1989 (1989-04-25) * column 1, line 5 - column 2, line 62 * * column 4, line 20 - line 26 * * column 7, line 3 - line 9 * * column 9, line 39 - column 10, line 21 * * column 15, line 14 - line 17 *	17-20, 22,23,30	
Y		25,29	
Y	EP 0 420 500 A (CYBER SCIENT INC) 3 April 1991 (1991-04-03) * page 12, line 32 - line 53; claim 12 *	10,15, 25,29	
A		12	TECHNICAL FIELDS SEARCHED (Int.Cl.7)  H04B G10K
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>9 November 2000</b>	Examiner <b>Schneiderbauer, K</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 5632

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-11-2000

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5539705	A	23-07-1996	NONE		
US 4823908	A	25-04-1989	JP	61253996 A	11-11-1986
			JP	61264995 A	22-11-1986
			JP	62008699 A	16-01-1987
			JP	1996081 C	08-12-1995
			JP	7028462 B	29-03-1995
			JP	61057197 A	24-03-1986
			JP	1996082 C	08-12-1995
			JP	7028463 B	29-03-1995
			JP	61057198 A	24-03-1986
			JP	1866722 C	26-08-1994
			JP	5076839 B	25-10-1993
			JP	61123389 A	11-06-1986
			DE	3590430 T	18-09-1986
			WO	8601670 A	13-03-1986
EP 0420500	A	03-04-1991	US	4991148 A	05-02-1991
			CA	2024527 A,C	27-03-1991
			CA	2124180 A	27-03-1991
			CA	2124181 A	27-03-1991
			DE	69030908 D	17-07-1997
			JP	3146891 A	21-06-1991

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**THIS PAGE BLANK (USPTO)**



**European Patent Office**

## Office européen des brevets



(11)

**EP 0 973 152 A9**

(12)

## CORRECTED EUROPEAN PATENT APPLICATION

Note: Bibliography reflects the latest situation

(15) Correction information:

**Corrected version no 1 (W1 A3)**

(51) Int Cl.7: **G10K 15/02**, H04B 14/00,  
G10K 11/26

(48) Corrigendum issued on:

**28.03.2001 Bulletin 2001/13**

(88) Date of publication A3:

03.01.2001 Bulletin 2001/01

(43) Date of publication A2:

**19.01.2000 Bulletin 2000/03**

(21) Application number: **99305632.4**

(22) Date of filing: **15.07.1999**

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE

**Designated Extension States:**

AL LT LV MK RO SI

(30) Priority: 16.07.1998 US 116271

27.04.1999 US 300022

(72) Inventor: Pompei, Frank Joseph  
Cambridge, MA 02139 (US)

(74) Representative: **Carpenter, David**  
**MARKS & CLERK,**  
**Alpha Tower,**  
**Suffolk Street Queensway**  
**Birmingham B1 1TT (GB)**

(71) Applicant: **MASSACHUSETTS INSTITUTE OF TECHNOLOGY**  
**Cambridge, MA 02139 (US)**

(54) **Parametric audio system**

(57) Ultrasonic signals are used to transmit sounds from a modulated ultrasonic generator (14) to other locations from which the sound appears to emanate. In particular, an ultrasonic carrier is modulated with an audio signal and demodulated on passage through the atmosphere. The carrier frequencies are substantially higher than those of prior systems, e.g. at least 60 kHz,

and the modulation products thus have frequencies which are well above the audible range of humans; as a result, these signals are likely to be harmless to individuals who are within the ultrasonic fields of the system. The signals may be steered to moving locations, and various measures are taken to minimise distortion and maximise efficiency.

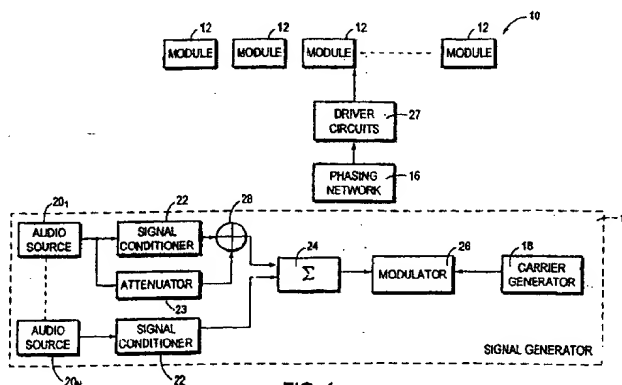


FIG. 1



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 30 5632

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 539 705 A (AKERMAN M ALFRED ET AL) 23 July 1996 (1996-07-23) * column 1, line 60 - column 2, line 56 * * column 6, line 26 - column 7, line 34 * * claim 1 *	1	G10K15/02 H04B14/00 G10K11/26
Y	---	10,15 5,6,8	
A			
X	US 4 823 908 A (TANAKA TSUNEO ET AL) 25 April 1989 (1989-04-25) * column 1, line 5 - column 2, line 62 * * column 4, line 20 - line 26 * * column 7, line 3 - line 9 * * column 9, line 39 - column 10, line 21 * * column 15, line 14 - line 17 *	17-20, 22,23,30	
Y	---	25,29	
Y	EP 0 420 500 A (CYBER SCIENT INC) 3 April 1991 (1991-04-03) * page 12, line 32 - line 53; claim 12 *	10,15, 25,29	
A	-----	12	TECHNICAL FIELDS SEARCHED (Int.Cl.7)  H04B G10K
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>9 November 2000</b>	Examiner <b>Schneiderbauer, K</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... &amp; : member of the same patent family; corresponding document</p>			

EPO FORM 1503 03/82 (P/AC01)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 5632

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-11-2000

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5539705	A	23-07-1996	NONE	
<hr/>				
US 4823908	A	25-04-1989	JP 61253996 A	11-11-1986
			JP 61264995 A	22-11-1986
			JP 62008699 A	16-01-1987
			JP 1996081 C	08-12-1995
			JP 7028462 B	29-03-1995
			JP 61057197 A	24-03-1986
			JP 1996082 C	08-12-1995
			JP 7028463 B	29-03-1995
			JP 61057198 A	24-03-1986
			JP 1866722 C	26-08-1994
			JP 5076839 B	25-10-1993
			JP 61123389 A	11-06-1986
			DE 3590430 T	18-09-1986
			WO 8601670 A	13-03-1986
<hr/>				
EP 0420500	A	03-04-1991	US 4991148 A	05-02-1991
			CA 2024527 A,C	27-03-1991
			CA 2124180 A	27-03-1991
			CA 2124181 A	27-03-1991
			DE 69030908 D	17-07-1997
			JP 3146891 A	21-06-1991
<hr/>				

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**THIS PAGE BLANK (USPTO)**